


	1	2
品牌	BOYA	长丰型号
		BY-MM1+

	7		8
修改名称	版本	变更内容	变更日期
BY-MM1+说明书	V01	内容更新	2020-4-11
			吴蒙蒙



BY-MM1+
Super-cardioid Condenser Shotgun Microphone
超心型电容式麦克风
Instruction Manual
说明书

Instruction Manual

Thanks for choosing BOYA!

The BY-MM1+ is an upgraded super-cardioid condenser microphone that delivers lower noise and higher sensitivity sound on your smartphones, tablets, DSLRs, consumer camcorder, PCs and more.

Due to its plug and play operation and no battery required design, the BY-MM1+ is a perfect audio solution for mobile journalists, vloggers and video hobbyists.

The BY-MM1+ features a compact and rugged aluminium body, while it will not be a heavy burden when recording.

The 3.5mm headphone output lets users monitor and playback audio with compatible apps, so you can ensure the integrity of audio.

Included detachable Rycote® Lyre® shock mount provides a reliable and solid construction, effectively eliminating noise from vibrations and camera handling.


Features

- Compatible with smartphones, tablets, DSLRs, consumer camcorder,PCs and more
- Super-cardioid condenser shotgun microphone
- Improved sensitivity and signal to noise ratio
- Plug and play operation
- Durable metal construction
- 3.5mm headphone output
- Rycote® Lyre® shock mount and furry windshield included

Specifications

Transducer:	Electret Condenser
Polar Pattern:	Super-cardioid
Frequency Response:	20Hz-18kHz
Sensitivity:	-36dB±3dB (0dB=1V/Pa,1kHz)
Signal to Noise Ratio:	78dB
Plug:	3.5mm TRRS line-out 3.5mm TRS headphone output
Dimensions:	Φ26x100mm (Φ1x3.9")
Net Weight:	60g (2.1oz)

Product Structure

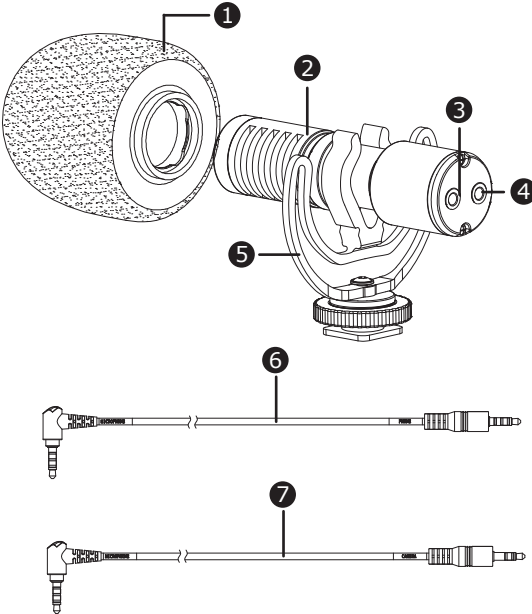

1. Furry windscreen
2. BY-MM1+ microphone
3. Audio output jack
4. 3.5mm headphone output
5. Rycote® Lyre® shock mount
6. 3.5mm TRRS to TRS output cable
7. 3.5mm TRRS to TRRS output cable


What's difference?


1) 3.5mm TRRS to TRS output cable
- For cameras, camcorders , audio recorders and other audio/video recording devices with audio monitoring jack.

2) 3.5mm TRRS to TRRS output cable
- For Smartphone, tablet or Mac.

1. Understand these instructions for use correctly


1.1 Marking on the device

 This symbol indicates, that your device meets the safety requirements of all applicable EU-directives.

 **Waste disposal and protection of the environment.**
Electric and electronic appliances as well as batteries must not be disposed of together with domestic waste. The user is legally obliged to return electric and electronic appliances as well as batteries to specially set up public collecting points or the sales outlet once they have reached the end of their service life. Details are regulated by national law. The symbol on the product, the instructions for use or the packaging refers to these provisions. The recycling, the material-sensitive recycling or any other form of recycling of waste equipment/batteries is an important contribution to the protection of our environment.


Attach the microphone to Smartphone or tablet.

1. Connect 3.5mm TRRS to TRRS output cable into your smartphone, tablet.
2. Open the audio or video recording app and start recording.
3. When finishing, plug the 3.5mm headphone output and playback the previous audio you recorded.

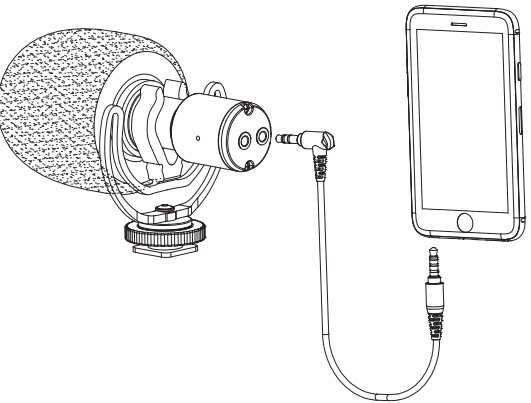


Attach the microphone to cameras, camcorders, audio recorders and other audio or video recording devices.



1. Turn counter-clockwise to loosen the screw.
2. Slide the microphone onto the camera's hot shoe.
3. Turn clockwise to tighten the screw to stabilize on the shoe mount.

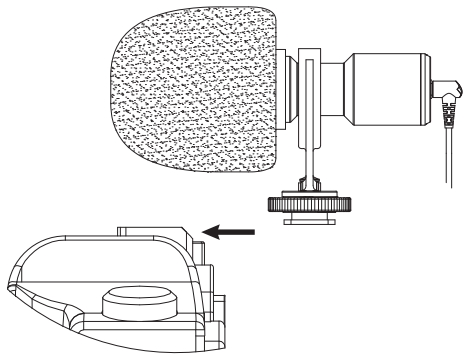

1. Plug the 3.5 mm TRS connector into the audio output jack of your device.

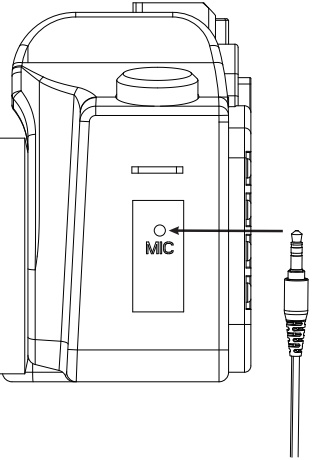

Specifications

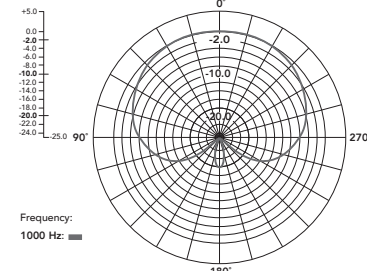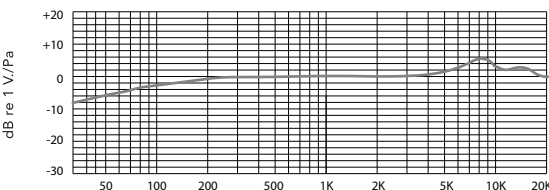

Trouble shooting

If you have any problem using the BY-MM1+ components, use the following checklist.
If any problem persist, please consult our local dealer, or contact us directly at sales@boya-mic.com.

Problem	Solution
The microphone can't work	Make sure that using the correct audio connector. 1) For smartphone, tablet or Mac, using 3.5mm TRRS to TRRS output cable. 2) For others devices, using 3.5mm TRRS to TRS output cable cable.
Too much ambience noise is being picked up	Make sure that the microphone is as close as possible to the subject. A certain amount of ambient noise is unavoidable in loud environments.



感谢您选择BOYA!
BY-MM1+超心型电容式麦克风, 为您的智能手机, 平板电脑, 数码单反, 摄像机, 个人电脑等设备, 收录低噪音和高灵敏度的声音。
对于主播, 视频博主及其他拍摄人群而言, BY-MM1+即插即用无需电源的设计, 为他们提供了一个完美音频解决方案。
BY-MM1+是紧凑和坚固的铝合金结构, 轻松外带进行录制。3.5mm耳机监听口设计, 让您可以确保音频的输出质量。
包装内含Rycote® Lyre®防震支架, 其稳固的结构能有效消除振动和操作相机时产生的噪音。

产品特点


- 可用于智能手机, 平板电脑, 数码单反, 摄像机, pc等
- 超心形电容式麦克风
- 高灵敏度及信噪比
- 即插即用操作
- 耐用金属结构
- 3.5mm耳机监听口
- 配备Rycote® Lyre® 防震支架和防风毛

参数

麦克风类型:	驻极体电容式
拾音模式:	超心型
频率响应:	20Hz-18kHz
灵敏度:	-36dB±3dB (0dB=1V/Pa,1kHz)
信噪比:	78dB
接口:	3.5mm TRRS线性输出 3.5mm TRS耳机监听输出
尺寸:	Φ26x100mm (Φ1x3.9")
重量:	60g (2.1oz)



产品结构

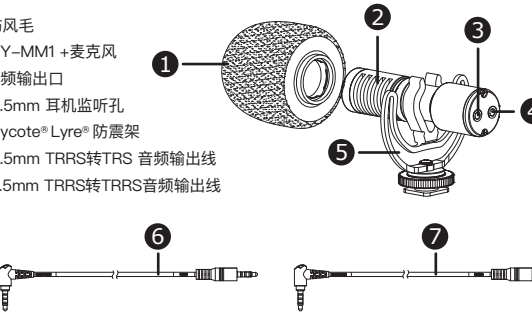


1. 防风毛
2. BY-MM1+麦克风
3. 音频输出口
4. 3.5mm 耳机监听孔
5. Rycote® Lyre® 防震架
6. 3.5mm TRRS转TRS 音频输出线
7. 3.5mm TRRS转TRRS音频输出线

音频输出线简介


1) 3.5mm TRRS转TRS 音频输出线
- 用于照相机, 摄影机, 录音笔及其他音频/视频带音频监听口的设备

2) 3.5mm TRRS转TRRS音频输出线
- 适用于智能手机, 平板电脑, Mac电脑。

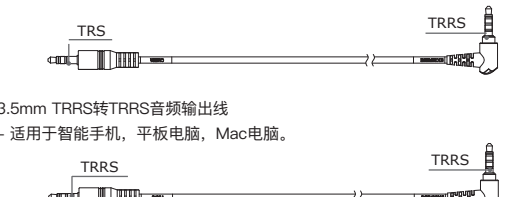



将麦克风连接到智能手机或平板电脑上

1. 连接3.5mm TRRS到TRRS音频输出线到您的智能手机, 平板电脑。
2. 打开音频或视频录制app, 开始录制。
3. 完成后, 插入3.5mm耳机监听口, 可回放监听之前录制的音频。



将麦克风连接到相机, 摄像机, 录音笔, 其他音频或视频设备上

1. 逆时针旋转, 松开螺丝。
2. 把麦克风滑到摄像机的热靴座上。
3. 顺时针旋转, 拧紧螺丝, 使麦克风固定在热靴座上。




将3.5mm TRS音频输出端连接至设备的麦克风输入接口上。

重要安全信息

- 确保遵循所有安全注意事项
- 将这些说明保存在安全的地方。
- 如果您出售设备或将其传递给其他人, 您也应该传递这些使用说明。

在设备上标记

 **废物处理和环境保护**
电气和电子设备以及电池不得与生活垃圾一起处理。用户在法律上有义务将电气和电子设备以及电池返回到专门设置的公共收集点或销售点, 一旦它们达到其使用寿命。

遵守国家法律法规。产品上的符号, 使用说明或包装是指这些规定。 废物设备/电池的回收是对保护环境的重要贡献。

- 请勿用湿手操作设备。
- 仅按照维护麦克风中所述的方式清洁设备
- 注意避免掉落设备。 确保设备已正确固定并可靠安装。如果设备已掉落, 请在熟练技术人员再次打开之前对其进行检查。
- 如果设备损坏或有缺陷, 或者您发现有灼热的气味, 请立即取出电池。请勿在外壳损坏的情况下操作设备, 也不要自行维修设备。只有熟练的维修人员才能修理设备

www.boya-mic.com

SHENZHEN JIAYZ PHOTO INDUSTRIAL, LTD.
The BOYA logo is a trademark which is registered and owned by Shenzhen Jiayz Photo Industrial, Ltd.
COPY RIGHT 2010-2020
深圳市长丰影像器材有限公司
地址: 深圳市观澜街道章阁大富路智能终端产业园A16栋
TEL: 400 6131096
Email: sales@boya-mic.com
www.boya-mic.com / www.jiayz.com

- 技术要求:
- 1、表面无色差
 - 2、无正负公差
 - 3、包装标注尺寸为内尺寸



JIAYZ长丰 深圳市长丰影像器材有限公司					
子件名称	BY-MM1+说明书	版本	V01		
子件编号	1F0300300219	材质	105g双铜纸	骑马钉	16p
尺寸	90x105	比例	1:1	单位	mm
设计/日期	吴蒙蒙 2020-4-11	审核	暂无	核准/日期	赵宏亮