


# Evoked 2400B Bi-color

LED Spot Light



1. Ultra high luminance of 41,910 lux @3m (at 5600K, with 45° reflector) that comparable to a 10K Tungsten or 4K HMI light
2. Wide CCT range of 2700K-6500K with G/M±80 adjustment
3. Built with electronic contacts, enable modifier recognition function
4. IP55 of both fixture and power supply providing thorough protection
5. Fully dimmable from 0 to 100% with 0.1% increment
6. Adjustable cooling system includes SMART, FULL SPEED, LOW SPEED, OFF modes
7. Comprehensive wired and wireless control methods:  
On-board, Remote Controller, NANLINK APP, Wire Controller, DMX/RDM, LumenRadio CRMX, Art-Net/sACN
8. Built-in 12 customisable practical effects

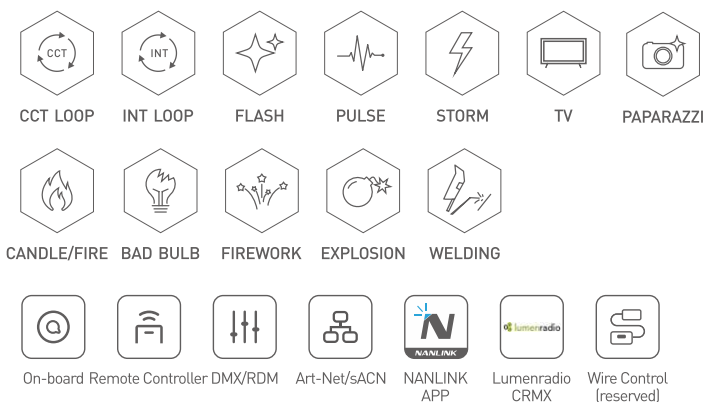


## Includes

Evoke 2400B x 1, Yoke x 1, Power Supply x 1, DC Connection Cable 7.5M x 1, AC Power Cable (2.5M+1M) x 1, AS-CP-QR-EV Quick Release Clamp x 1, WS-RC-C2 Remote Controller x 1, USB Flash Drive x 1, User Manual x 1, CC-EV2400-FT-F0 Flight Case x 1, RF-NLM-45-EV2400 Reflector 45° with Soft Bag x 1 (packed separately)

\*3.5M AC Cable with Edison Connector for 110V voltage countries, for switching the power from 1700W (15Amp) to 2200W (20Amp).

## Multiple Accessories, More Applications

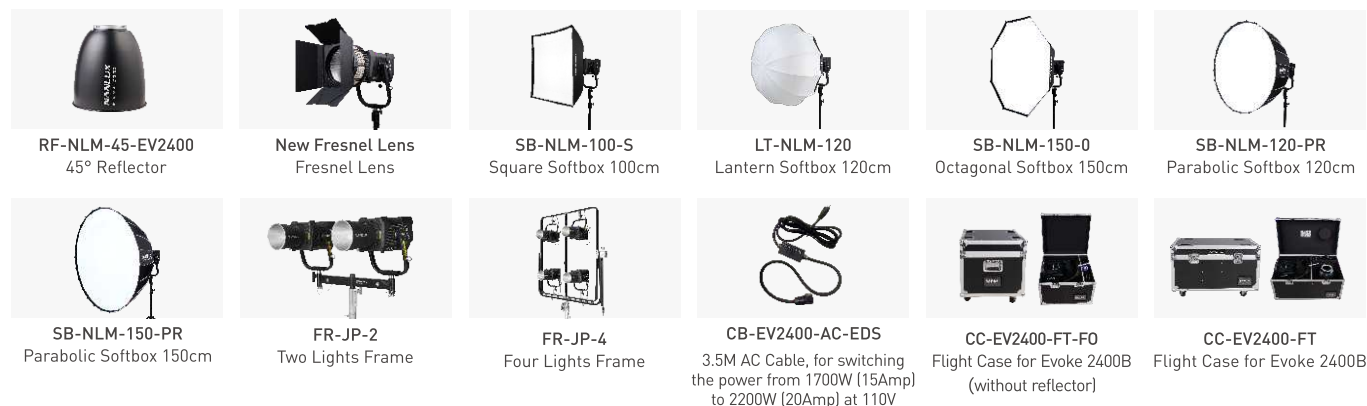

## Evoke 2400B Technical Data

Model	<b>Evoke 2400B</b>
Rated Power	2400W
Input Voltage/Current	DC48V/26A x 2, AC100V-240V 50/60Hz 26A Max
CCT	2700K-6500K [G/M±80]
CRI	Average 96
TLCI	Average 97
TM-30	Rf: Average 95 / Rg: Average 100
Dimming	0-100%, stepless 0.1% from 0-100%
IP Rating	IP55
Control	On-board, Remote Controller, NANLINK APP, DMX/RDM, LumenRadio CRMX, Art-Net/sACN, Wire Control (reserved)
Effects	CCT Loop, INT Loop, Flash, Pulse, Storm, TV, Paparazzi, Candle/Fire, Bad Bulb, Firework, Explosion, Welding
Product Size	Light Fixture (without COB protective cap): 427.3 × 316.4 × 265.1mm / 16.8 × 12.5 × 10.4" Power Supply: 389.2 × 172.2 × 268.3mm / 15.3 × 6.8 × 10.6"
Product Weight	Light Fixture (without COB protective cap): 15kg / 33.1lb Power Supply: 11.58kg / 25.53lb

## Illumination (lux / fc)

CCT	Distance	Light Only	With 45°Reflector
3200K	3M	8732 lux / 811 fc	36710 lux / 3410 fc
	5M	3478 lux / 323 fc	12270 lux / 1140 fc
	7M	1848 lux / 172 fc	6381 lux / 593 fc
	9M	1152 lux / 107 fc	3872 lux / 360 fc
5600K	3M	9584 lux / 890 fc	41910 lux / 3893 fc
	5M	3801 lux / 353 fc	14070 lux / 1307 fc
	7M	2028 lux / 188 fc	7254 lux / 674 fc
	9M	1266 lux / 118 fc	4401 lux / 409 fc