



微信公众账号



FACEBOOK

安徽长庚光学科技有限公司

www.laowalens.com

服务热线:400-066-1316

Email: sales@laowalens.com

电话Tel: (+86) 551-69107990

地址: 合肥市庐阳区天水路与太和路交口庐阳中科大校友创新园5号楼

Add: Building 5, USTC Alumni Innovation Park, Crossing of Tianshui
and Taihe Road, Luyang District, Hefei City, Anhui Province, China

老蛙移轴专用支架升级版

使用手册

Instruction Manual

LAOWA 老蛙

本公司保留更改产品设计与规格的权利, 届时恕不另行通知;
本公司保留对此《使用说明》的最终解释权。
Please note we reserve the right to change our product's
design and specifications at any time without notice and
to the final interpretation of the *Instruction Manual*.



前言

感谢您购买老蛙移轴专用支架升级版,此款支架是为了实现移轴后组接片专门研发。本品采用铝合金材质,保证强度的同时,更加轻便的重量。可实现360°旋转,无需重复调整镜头方向,后期接片轻松完成。使用移轴支架的目的是为了固定镜头的光轴,保证光轴不变,便于后期接片。



为了操作上的安全,使用本产品前请务必详细阅读使用手册与注意事项,并将手册放在需要时容易取得的地方。如遇到不能解决的问题请通过售后电话获取技术支持。

使用说明

- 此支架整体结构分为固定内环和可360°旋转外环。内环用于固定镜头和相机，外环可实现360°旋转，完成后组移轴，实现精准接片。

镜头安装方法



1、支架固定在三脚架上，
拧松锁止机构打开支架



2、镜头由后至前放入锁止
环并限位机构放入支架卡槽



3、锁止环锁止镜头



4、安装相机


旋转机构使用方法



镜头固定后，拧松旋转机构螺丝，可实现360°旋转。旋转机构每15°设有刻度标记，可根据实际拍摄需求改变旋转角度，拧紧螺丝方可固定角度。

如果您需要更加详细的使用介绍，请进入<https://www.cglen.com/>老蛙镜头官方网站，有移轴支架专属视频介绍。

各部件名称

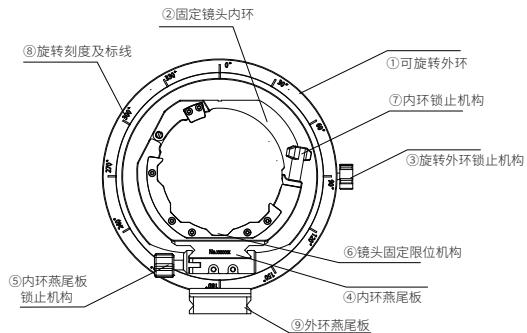

LOW 老蛙



Preface

Thank you for purchasing Laowa's upgraded version of the shift lens support, which is specially created for rear-group photo stitching of Laowa shift lenses.

This product is made of aluminium alloy, making it light yet strong. It can rotate 360 ° without adjusting the lens and photo stitching in post-production can be easily achieved.

The purpose of using the shift lens support is to fix the optical axis of the lens, maintain the optical axis in position and then facilitate photo stitching in post-production.




For operational safety, please read the manual and precautions carefully before using this product, and keep the manual at a place that is easily accessible when needed. If you encounter a problem that cannot be solved, please ask for technical support through email.

Directions for use

- The overall structure of the shift lens support consists of two parts, a fixed inner ring and a 360° rotatable outer ring. The inner ring is used to attach the lens and camera, while the outer ring can rotate 360° and complete rear-group shift to achieve accurate precise photo stitching.

Lens mounting method



1, attach the shift lens support to the tripod and loosen the locking mechanism to open the shift lens support



2, put the lens into the locking ring from back to front and place the position-limit mechanism into the slot of the shift lens support




3, lock the lens with the locking ring



4, mount the lens to your camera


■ Using method of rotating mechanism

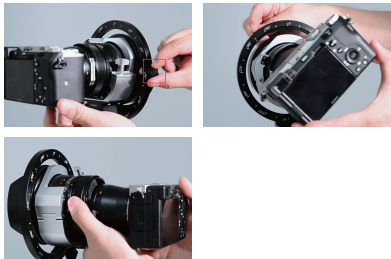

After fixing the lens, loosen the screw of the rotation mechanism to achieve 360° rotation. The rotation mechanism is equipped with scale marks at every 15°. The rotation angle can be changed according to the actual shooting needs, and the angle can be fixed by tightening the screws.

- If you need a more detailed usage introduction, please visit the official website of Laowa, which has an exclusive video introducing the shift lens support. The website: <https://www.cglenz.com/>.

Nomenclature

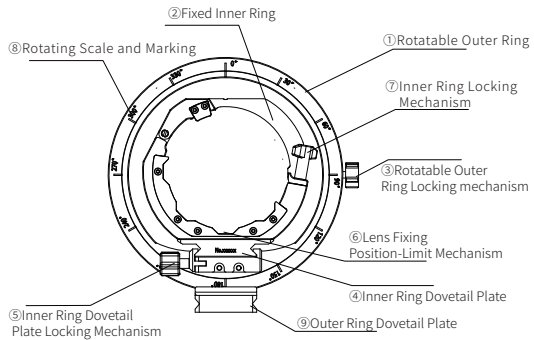

LOW 老蛙